


BOOT 1-3-3

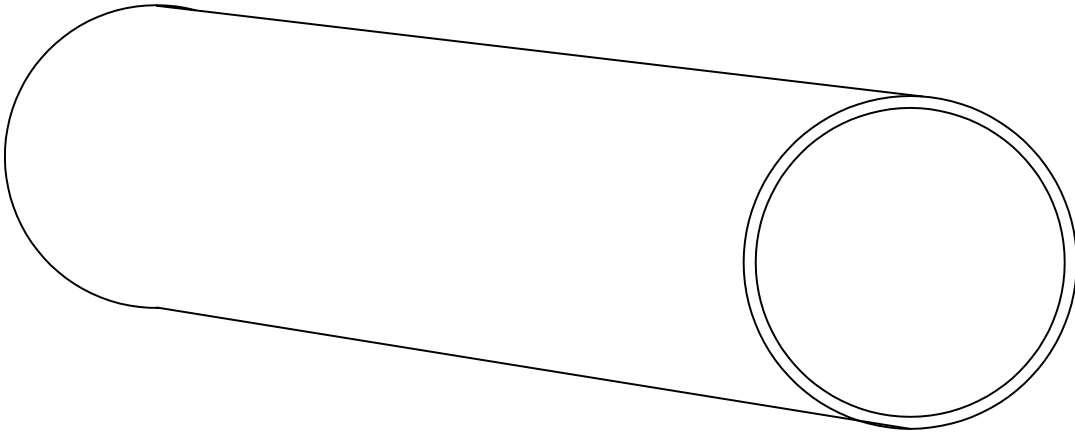

NOMINAL LENGTH 6"

I.D. MINIMUM .750

I.D. MAXIMUM 4.50

MAXIMUM PROCESS TUBE OPERATING TEMPERATURE 1000°F

COMPONENTS INCLUDE: CERAMIC PUTTY

CHARACTERISTICS: HEAT SHRINKABLE/WATER TIGHT/

THERMALLY STABILIZED/CROSSLINK POLYOLIFIN

REVISIONS			DESCRIPTION:
ECD	BY	DATE	
			BOOT KIT SPECIFICATIONS
DRAWN 4/11/03			THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO DEKORON/UNITHERM AND IS FURNISHED UPON THE EXPRESS CONDITION THAT THE INFORMATION CONTAINED HEREIN WILL NOT BE USED FOR SECOND SOURCE PROCUREMENT OR DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO THE INTERESTS OF DEKORON/UNITHERM A DIVISION OF CARBIDE USA. COPYRIGHT 2003

